

ACROLINK®

7N Cu INTERCONNECT & DIGITAL CABLE SERIES
Stressfree® 99.99999% Purity Copper

7N-D5050 Leggenda

INTERCONNECT CABLE RCA



DIGITAL CABLE RCA



DIGITAL CABLE BNC



Cable materials & Specifications

Conductor	: 7N Cu D.U.C.C Stressfree 0.26φ×19 strands
Insulation	: Poly Tetra Fluoro Ethylene Teflon tape + Polyethylene
Shielding	: Copper foil tape + silver plated braided copper wire
Outer sleeve	: Anti UV Polyurethane
Conductor resistance	: 16mΩ/m
Electrostatic capacitance	: 68pF/m
Impedance	: 75Ω
Cable diameter	: 10.0mm


RCA connector specifications

Center contact pin	: Hollow shaped Tellurium copper
Outer contact part	: Beryllium copper
Plating	: Rhodium
Cover	: Aluminum + Carbon fiber

BNC connector specifications

Center contact pin	: Gold plated phosphor bronze
Outer contact part	: Delrin
Outer body	: Brass + Aluminum + Carbon fiber

7N-D5050 Leggenda Cable structure

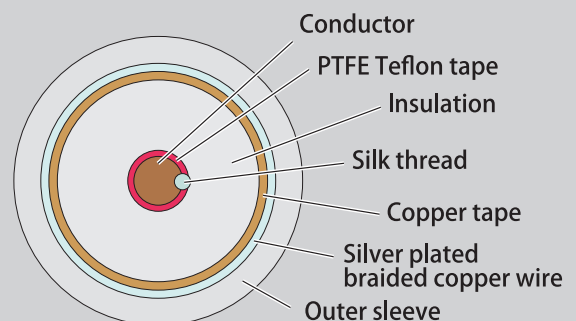

Standard length of 7N-D5050 Leggenda series are 1.0m and 1.5m.
Special length order is available.

● The standard, the specification, and the price of the product might change without a previous notice.
● "ACROLINK®" and "Stressfree®" are registered trademarks of Acro Japan Co., Ltd. ● "D.U.C.C.®" is a registered trademark of Mitsubishi Materials Corporation. ● "Teflon®" is a registered trademark of DuPont in the United States.