

ACROLINK®

7N Cu MEXCEL DIGITAL & INTERCONNECT CABLE SERIES
Stressfree® 99.99999% Purity Copper

7N-DA3300 MEXCEL


INTERCONNECT CABLE RCA



INTERCONNECT CABLE XLR



DIGITAL CABLE AES/EBU

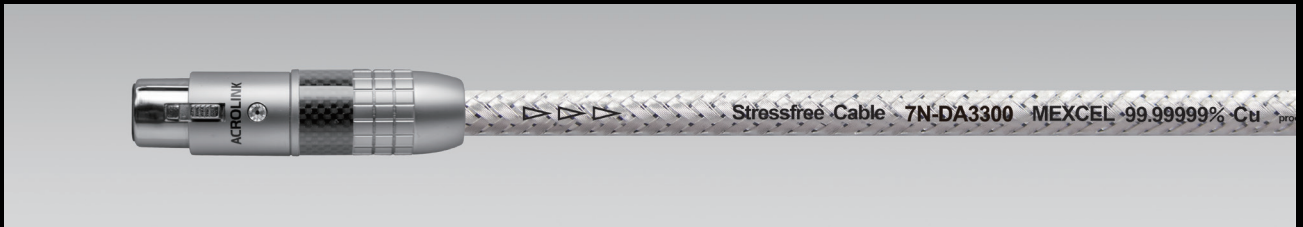

SPECIFICATIONS


Conductor	: 7N Cu MEXCEL solid core 0.8mm×2 (Balanced twin-core structure)
Insulation	: Polyethylene
Shielding	: Copper clad mylar tape + silver plated copper braided wire
Outers sleeve	: UV resistant Polyurethane
Conductor resistance	: 36.4mΩ/m
Impedance	: 110Ω(XLR & AES/EBU)
Cable diameter	: 9.5mm

RCA CONNECTOR

Positive terminal	: Tellurium copper
Negative terminal	: Beryllium copper
Plating	: Mirror polish treatment with direct rhodium plating
Outer body material	: Aluminum + Carbon fiber

XLR CONNECTOR

Contact terminal	: Phosphor bronze
Terminal plating	: Direct rhodium plating
Outer body material	: Brass

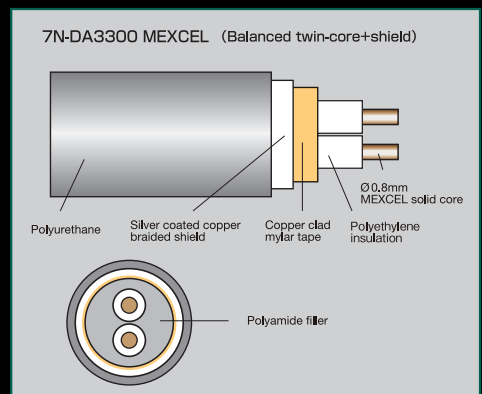

MEXCEL is a conductor insulation technology using a system called MEDIS® (Mitsubishi Electro Deposition Insulation System) which is developed and patented technology by Mitsubishi Cable Industries Ltd. Each conductor is perfectly and evenly insulated

Stranded length for 7N-DA3300 MEXCEL is 1.0m and 1.5m pair. Special length order available.

- The standard, the specification, and the price of the product might change without a previous notice.
- "ACROLINK®" and "Stressfree®" are registered trademarks of Acro Japan Co., Ltd.
- "D.U.C.C.®", "MEXCEL®" and "MEDIS®" are registered trademarks of Mitsubishi Materials Corporation.