


ACROLINK®


7N Cu MEXCEL DIGITAL & INTERCONNECT CABLE SERIES
Stressfree® 99.99999% Purity Copper

7N-DA6100IV MEXCEL


INTERCONNECT CABLE RCA

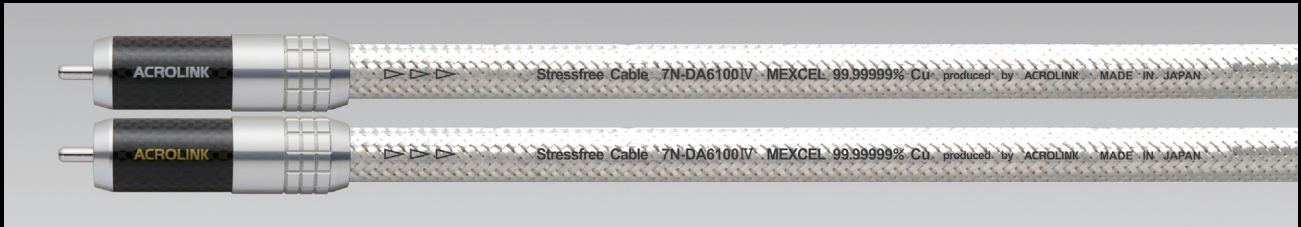

DIGITAL CABLE BNC

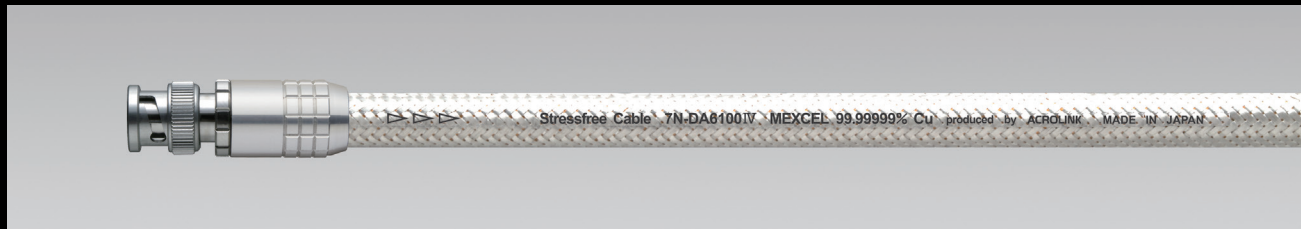

DIGITAL CABLE RCA

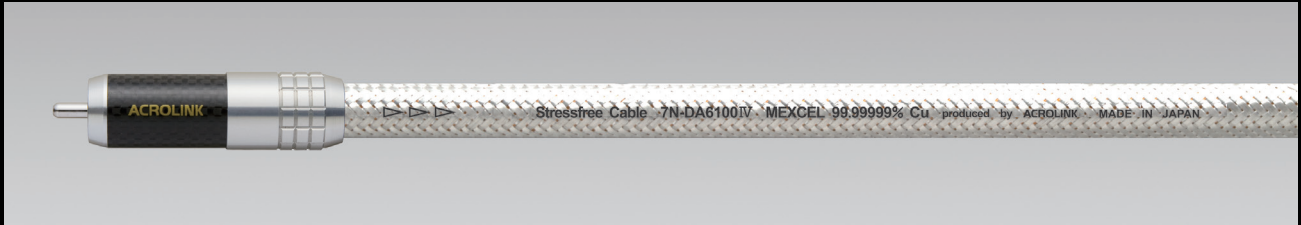

Cable specification

Center conductor	: 2.0φ 7N Cu MEXCEL
Insulation	: Polyethylene
Outer conductor	: 7N Cu MEXCEL braided flat angled 0.085mm x 1.26mm x 24 strands
Inner shielding	: Copper tape
Outer shielding	: Braided silver plated copper wire
Outer sleeve	: UV resistant polyurethane
Conductor resistance	: Under 8.0mΩ/m
Electrostatic capacitance	: 48pF/m
Impedance	: 75Ω
Cable diameter	: 11.0mm


RCA connector specifications

Center contact pin	: Beryllium copper (Hot)
Outer connect parts	: Phosphor bronze (Cold)
Plating	: Polished twice before being plated with silver layered rhodium
Outer body	: Duralumin + Carbon fiber + Aluminum

BNC connector specifications

Center contact pin	: Phosphor bronze (Hot)
Outer connect parts	: Phosphor bronze (Cold)
Plating	: 24K gold for center contact pin. Silver layered rhodium for outer contact parts
Outer body	: Brass + Duralumin

7N-DA6100IV MEXCEL (Coaxial)

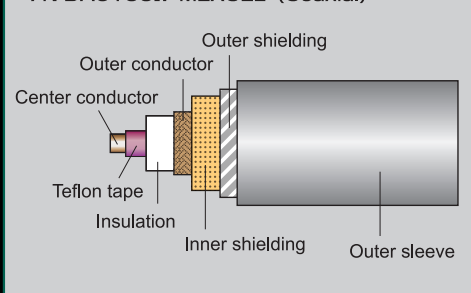

MEXCEL is a conductor insulation technology using a system called MEDIS® (Mitsubishi Electro Deposition Insulation System) which is developed and patented technology by Mitsubishi Cable Industries Ltd. Each conductor is perfectly and evenly insulated.

Stranded length for 7N-DA6100IV MEXCEL is 1.0m and 1.5m pair. Special length order available.

- The standard, the specification, and the price of the product might change without a previous notice.
- "ACROLINK®" and "Stressfree®" are registered trademarks of Acro Japan Co., Ltd.
- "D.U.C.C.®", "MEXCEL®" and "MEDIS®" are registered trademarks of Mitsubishi Materials Corporation.