


ACROLINK®


7N Cu POWER CABLE
Stressfree 99.99999% Purity Copper

7N-PC4020 Leggenda

7N-PC4020 Leggenda UL version

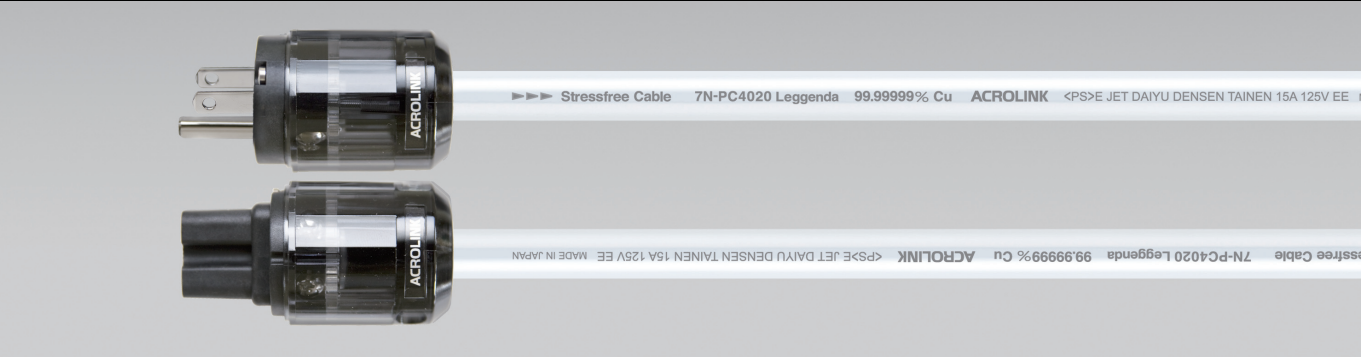


7N-PC4020 Leggenda Schuko version

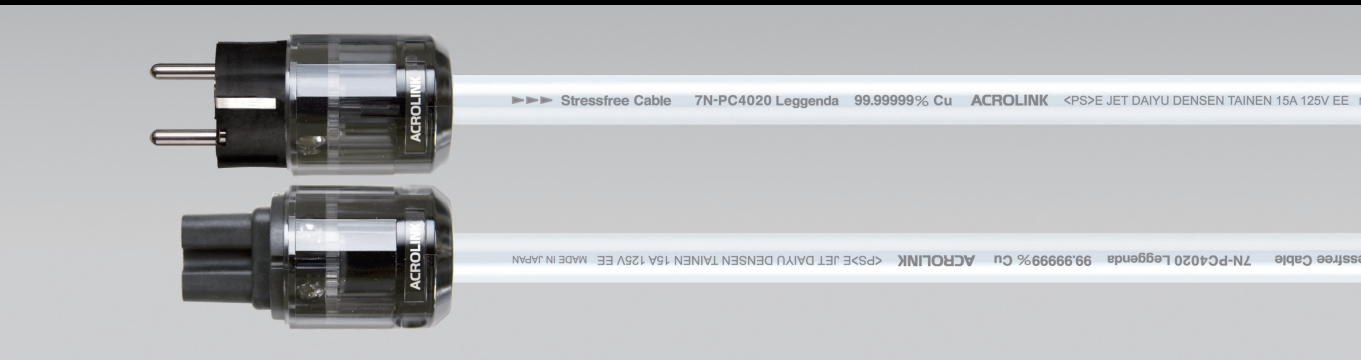

●7N-PC4020 Leggenda Standard length is 1.5m. Special length order is available.

7N-PC4020 Leggenda CB

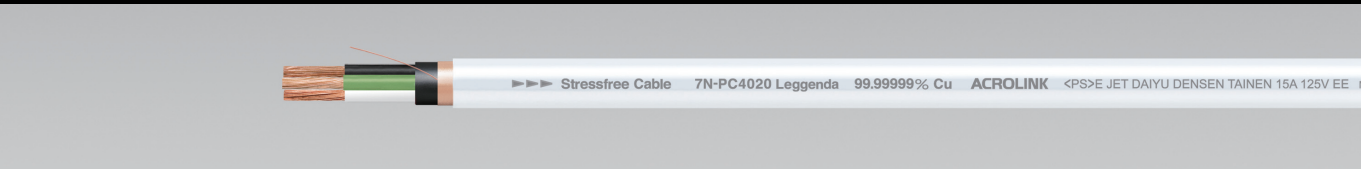

●7N-PC4020 Leggenda CB Packaging : 30m on spool

Cable materials & Specifications

- Conductor : 7N Cu D.U.C.C Stressfree×2 (0.37×18 strands)
: 4N Cu for ground (0.37×18 strands)
- Insulation material : High molecular Polyolefin Resin (Black & White & Green)
- 1st Inner sleeve : High molecular Polyolefin + tungsten + amorphous + carbon powder
- 2nd Inner sleeve : Polyolefin with Resonance control powder
- Shielding : Copper foil with drain wire
- Outer sleeve : Lead free Polyvinyl Chloride
- Conductor resistance : 7.0mΩ/m
- Cable diameter : 12.6mm

Power plug & IEC connector

- Contact parts : Beryllium copper
- Plating : Silver layered rhodium (polished before plating)
- Body : Poly Butylene Terephthalate with glass fiber
- Outer case : Polycarbonate

Cable Structure

