


# ACROLINK®


7N Cu POWER CABLE  
Stressfree® 99.99999% Purity Copper

## 7N-PC4030 Leggenda

7N-PC4030 Leggenda UL version

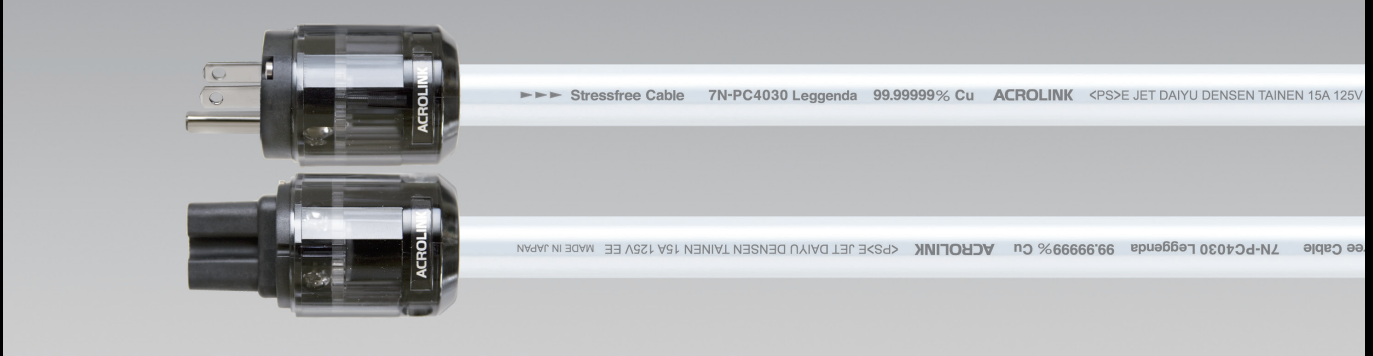


7N-PC4030 Leggenda Schuko version

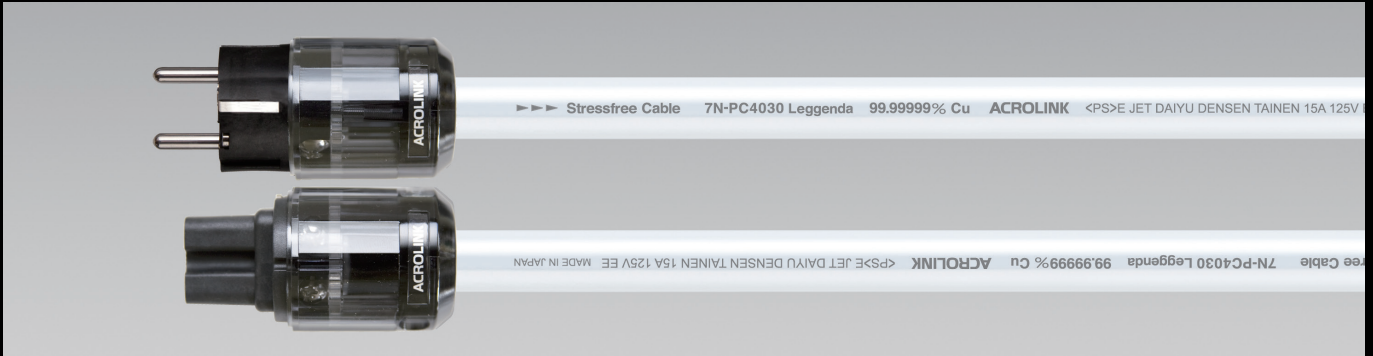

●7N-PC4030 Leggenda Standard length is 1.5m. Special length order is available.

## 7N-PC4030 Leggenda CB

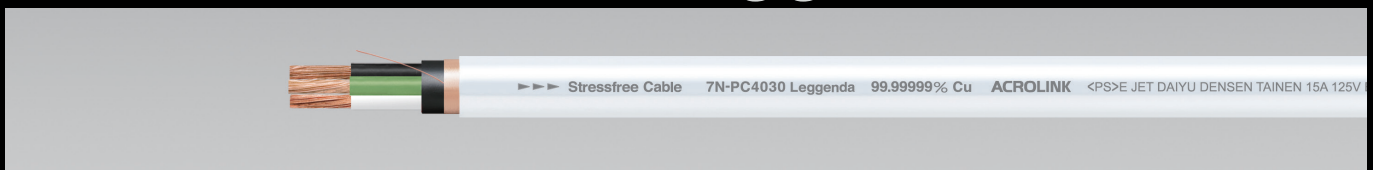

●7N-PC4030 Leggenda CB Packaging : 30m on spool

### Cable materials & Specifications

Conductor	: 7N Cu D.U.C.C Stressfree×2 (0.37×50 strands)
	: 4N Cu for ground (0.37×50 strands)
Insulation material	: High molecular Polyolefin Resin (Black & White & Green)
1st Inner sleeve	: High molecular Polyolefin + tungsten + amorphous + carbon powder
2nd Inner sleeve	: Polyolefin with Resonance control powder
Shielding	: Copper foil with drain wire
Outer sleeve	: Lead free Polyvinyl Chloride
Conductor resistance	: 2.8mΩ/m
Cable diameter	: 15.7mm

### Power plug & IEC connector

Contact parts	: Beryllium copper
Plating	: Silver layered rhodium (polished before plating)
Body	: Poly Butylene Terephthalate with glass fiber
Outer case	: Polycarbonate

7N-PC4030 Leggenda Cable structure

