ACROLINK®

7N Cu POWER CABLE
Stressfree® 99.99999% Purity Copper

7N-PC8100 Leggenda

UL version

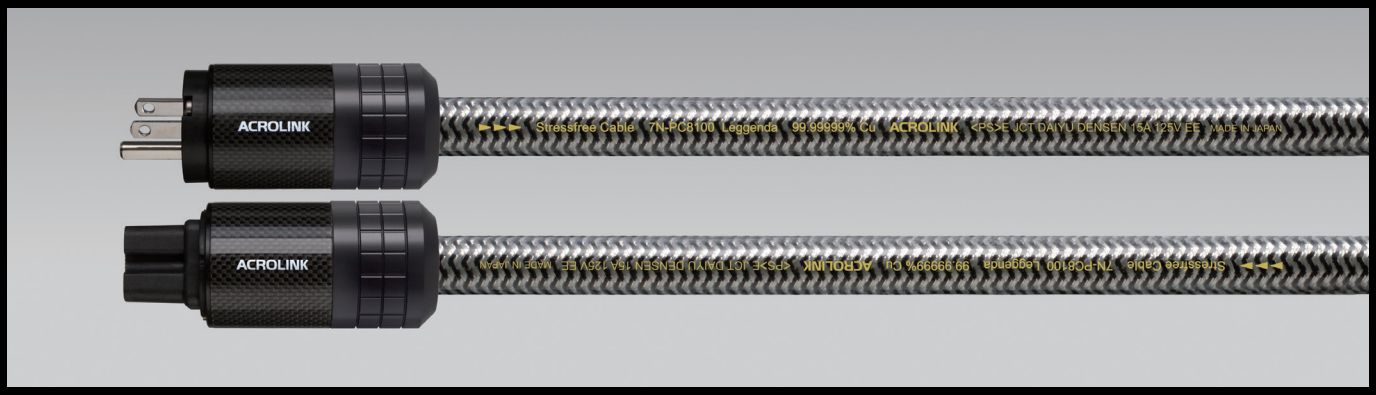

Schuko version

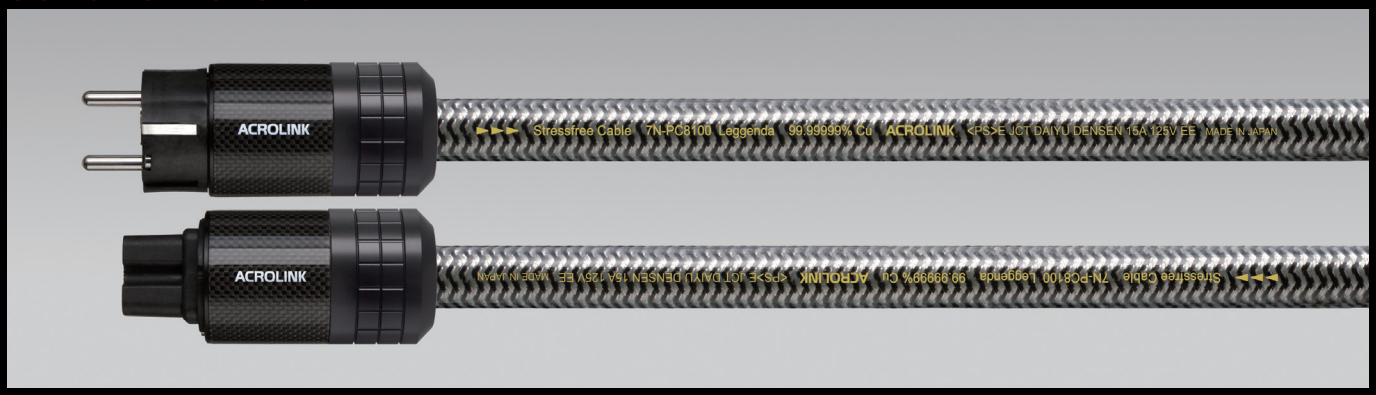

Cable materials & Specifications

Conductor	: 7N Cu D.U.C.C Stressfree 0.37ø x 50 strands×2 cores （AWG 10）
	4N5 Cu for ground 0.37ø x 50 strands （AWG 10）
Insulation material	: High molecular Polyolefin Resin（Black & White & Green）
1st Inner sleeve	: High molecular Polyolefin + tungsten + amorphous + carbon powder
2nd Inner sleeve	: Polyolefin with Resonance control powder
Final shielding	: Polyurethane enameled wire（Black）
	+Silver plated copper（Silver）braided wire
Outer sleeve	: UV resistant Polyurethane
Conductor resistance	: 3.3mΩ/m
Cable diameter	: 16.0mm

Power plug & IEC connector

Contact parts	: Beryllium copper
Plating	: Silver layered rhodium (polished before plating)
Body	: Special resin + brass + carbon fiber + aluminum
	Black anodized aluminum specially for 7N-PC8100 Leggenda

Standard length of 7N-PC8100 Leggenda is 1.5m.
Special length order is available.

7N-PC8100 Leggenda

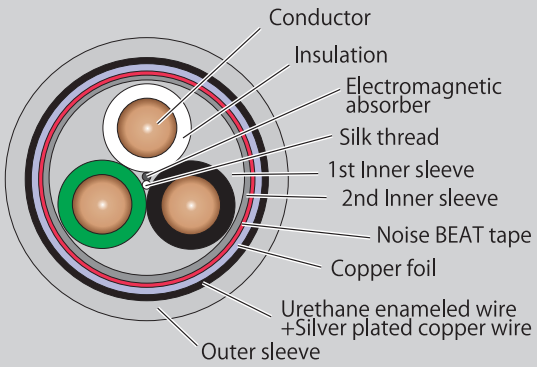

D.U.C.C stands for Dia Ultra Crystallized Copper which is specifically developed copper wire for high-end audio cables. D.U.C.C has controlled crystal structure and the minimized transmission loss. Patent technology and registered trade mark of Mitsubishi Materials LTD.

Noise BEAT tape is a thin aluminum resin tape which is able to efficiently absorb noise current. Developed and trade mark of NTT AT （Nippon Telegraph and Telephone Corporation Advanced Technology）

● The standard, the specification, and the price of the product might change without a previous notice.
● “ACROLINK®” and “Stressfree®” are registered trademarks of Acro Japan Co., Ltd. ● “D.U.C.C.®” is a registered trademark of Mitsubishi Materials Corporation
● “Noise BEAT®” is a registered trademark of NTT Advanced Technology Corporation.