


ACROLINK®

7N Cu SPEAKER CABLE
Stressfree® 99.99999% Purity Copper

7N-S8000 Leggenda

BANANA PLUG/SPADE LUG

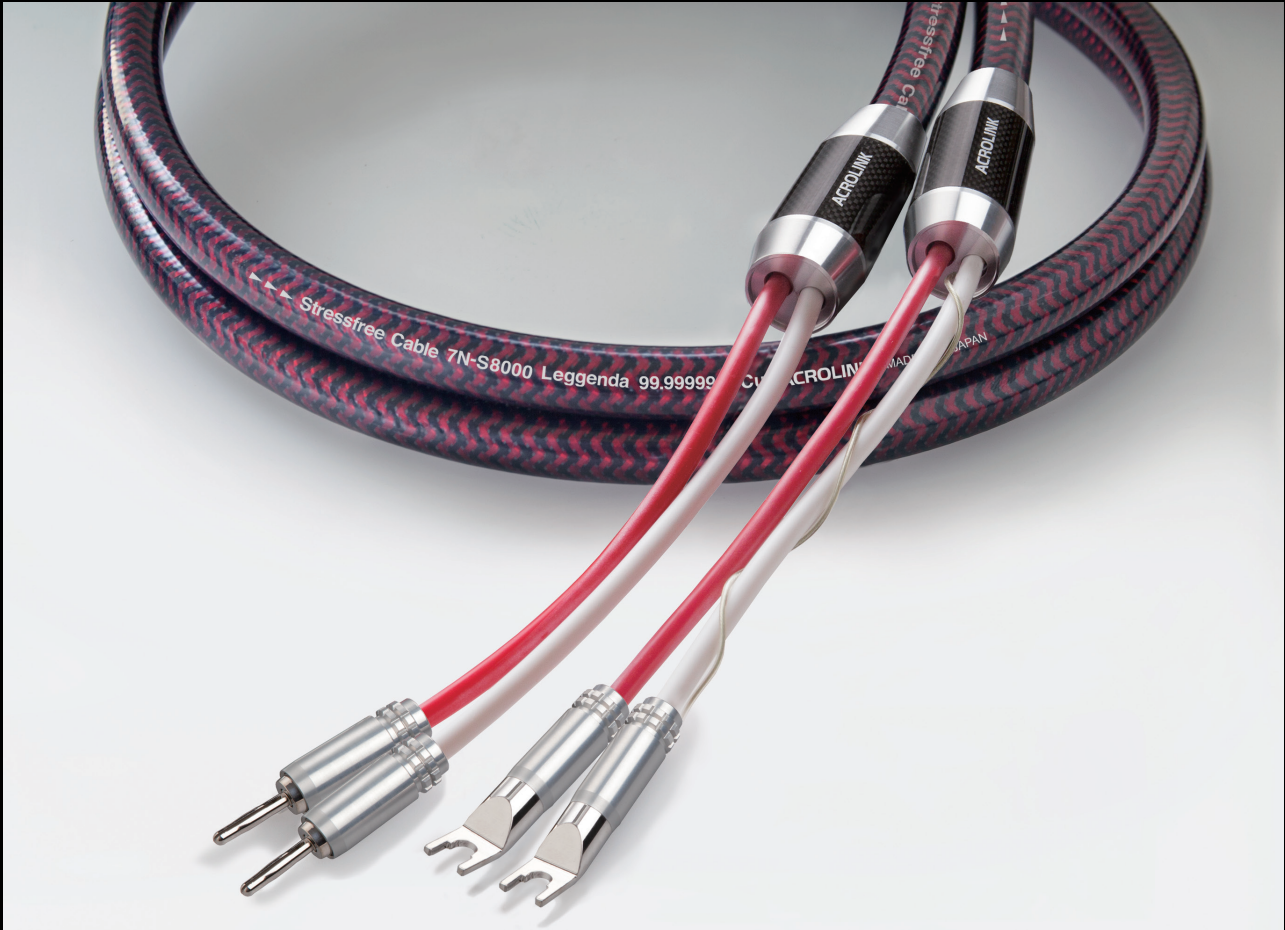

SPECIFICATIONS


Outer size	: 18.7mm
Signal Conductor	: 7N Cu D.U.C.C Stressfree 0.37mm×50strands×2cores
Signal Conductor size	: 5.36 Sq (AWG 10)
Insulation material	: Polyethylene resin with PTFE Teflon tape (Red & White)
First sleeve	: Polyolefin with Resonance control powder + Tungsten + Amorphous
Shielding	: Noise beat tape + copper tape
Second sleeve	: High molecular Polyolefin Resin
Final shielding	: Polyurethane enameled braided wire (Red & black)
Outer sleeve	: UV resistance Urethane resin
Conductor resistance	: 2.5mΩ/m
Capacitance	: 17pF/m

BANANA PLUG

Material	: Beryllium 50 copper
Plating	: Silver layered rhodium plating
Outer body material	: Duralumin

SPADE LUG

Material	: 6N Cu copper
Plating	: Silver layered rhodium plating
Outer body material	: Duralumin

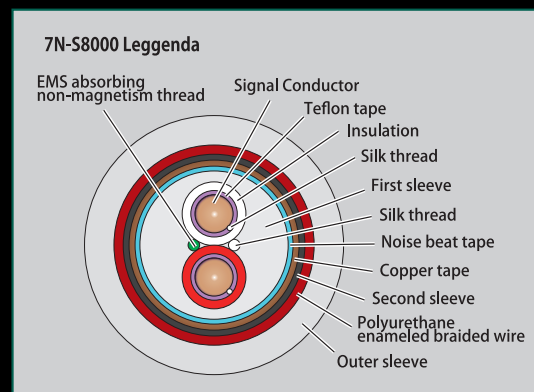

- The cable shield and negative side termination is connected by a wire for electric field shielding effect.
- Standard length for this speaker cable will be 2.0m pair.
- Special length order available. Please specify terminations when ordering.

※Noise BEAT tape is EMI noise reduction tape using magnetic alloy films. This tape is developed by NTT AT Corporation (Nippon Telegraph and Telephone Corporation Advanced Technology).

● The standard, the specification, and the price of the product might change without a previous notice.
● "ACROLINK®" and "Stressfree®" are registered trademarks of Acro Japan Co., Ltd. ● "D.U.C.C.®" is a registered trademark of Mitsubishi Materials Corporation. ● "Noise BEAT®" is a registered trademark of NTT Advanced Technology Corporation. ● "Teflon®" is a registered trademark of DuPont in the United States.