

ACROLINK®


*8N Cu POWER CABLE
Stressfree 99.99999% Purity Copper*

8N-PC8100 Performante

UL version



Schuko version

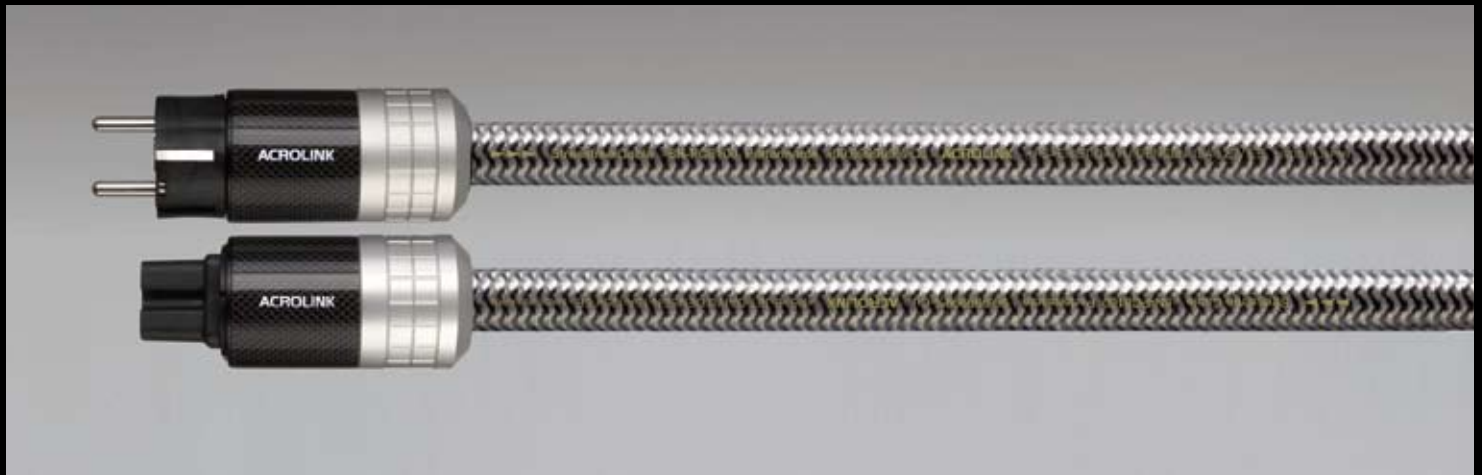

Cable materials & Specifications

Conductor	: Stressfree 8N Cu 0.37 ϕ x 50 strands
Insulation material	: High molecular Polyolefin Resin (Black & White & Green)
1st Inner sleeve	: High molecular Polyolefin + tungsten + amorphous + carbon powder
2nd Inner sleeve	: Polyolefin with Resonance control powder
Final shielding	: Polyurethane enameled braided wire +Silver plated copper wire (Black & Silver)
Outer sleeve	: UV resistant Polyurethane
Conductor resistance	: 3.3m Ω /m
Cable diameter	: 16.0mm

Power plug & IEC connector

Contact parts	: Beryllium copper
Plating	: Silver layered rhodium (polished before plating)
Body	: Special resin + brass + carbon fiber + aluminum

Standard length is 1.5m. Special length order is available.

8N-PC8100 Performante

